





Bollards & Barriers  
Direct

BFT STOPPY MBB  
BOLLARD

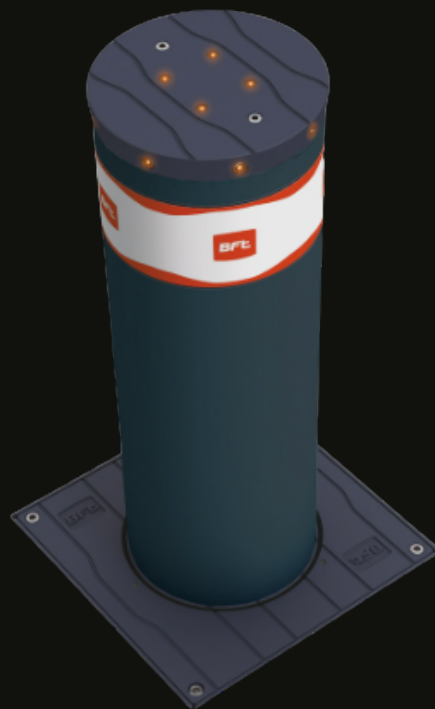

# STOPPY MBB

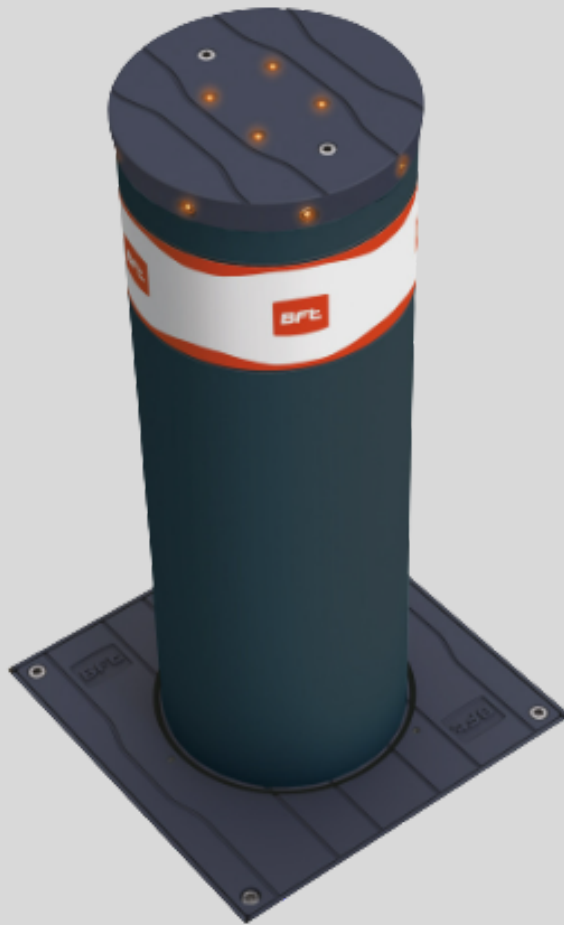


The STOPPY MBB bollard is an electromechanical bollard available in both 500mm and 700mm height, with a 219mm diameter.

Both versions are equipped with an LED light crown and are available with either a stainless steel finish or a painted steel dark grey RAL 7015 finish depending on your requirements.

This bollard is designed to work in extreme conditions with all metal parts cathaphoresis- treated.

## FEATURES

- Power supply: 230v ~ 50/60Hz
- IP67 protection rating
- Cylinder height: 500mm and 700mm
- Cylinder diameter: 219mm
- Intensive use
- Stainless steel or painted steel option
- LED light crown
- 6 second rising time

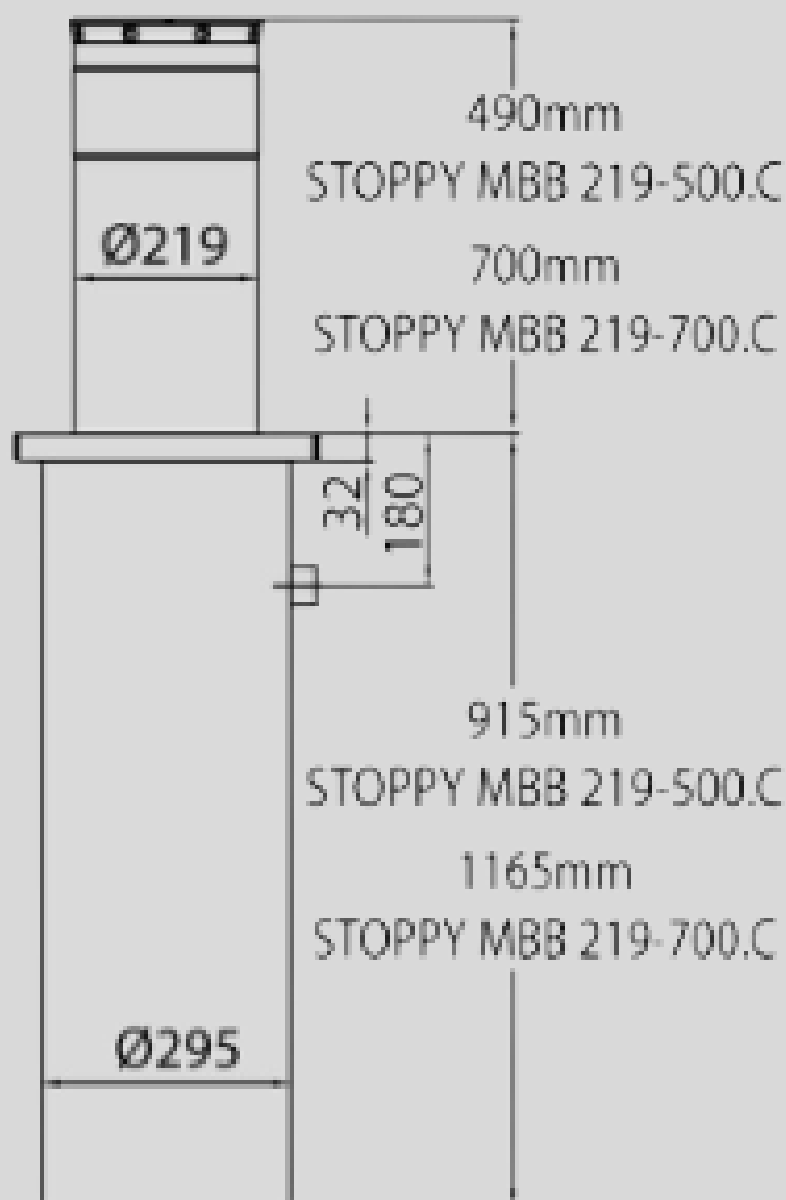

# DATA

| STOPPY MBB             |                   |
|------------------------|-------------------|
| Manufacturer           | BFT               |
| Product                | STOPPY MBB        |
| Material (Bollard)     | Stainless steel   |
| Bollard height         | 500mm and 700mm   |
| Bollard diameter       | 219mm             |
| Drive motor            | Electromechanical |
| Rising Time            | 6 seconds         |
| Protection Class       | IP67              |
| Operating temperatures | -25c to +60c      |
| Warranty               | 1 year            |



## Environment

The STOPPY MBB is designed to work in extreme conditions.



## Options

Bollard types;

- 500mm and 700mm height
- Stainless steel finish
- Grey (RAL 7021) painted steel finish