



Bollards & Barriers
Direct

BFT STOPPY B BOLLARD



STOPPY B




The STOPPY B bollard is an electromechanical bollard available in two sizes with either a stainless steel finish or a painted steel dark grey RAL 7015 finish depending on your requirements.

The 500mm height bollard with a diameter of 115mm or the 700mm bollard with a 200mm diameter provide the perfect solution for traffic management and security across a wide range of environments.

The STOPPY B bollards also come with rear reflecting strips for increased visibility during darkness.

FEATURES

- Power supply: 230v ~ 50/60Hz
- IP67 protection rating
- Cylinder height: 500mm and 700mm
- Cylinder diameter: 115mm and 200mm
- Intensive use
- Stainless steel or painted steel option
- 700mm height bollard comes with LED light crown

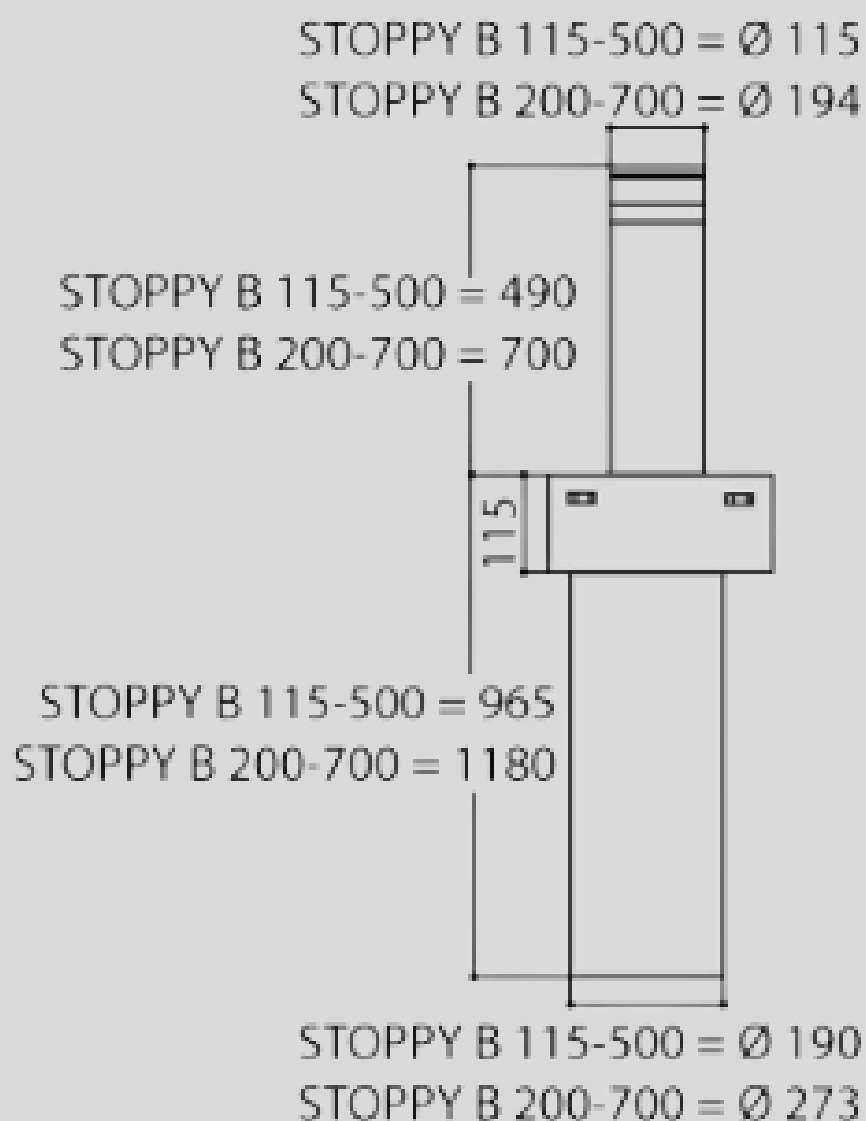

DATA

STOPPY B	
Manufacturer	BFT
Product	STOPPY B
Material (Bollard)	Stainless steel
Bollard height	500mm and 700mm
Bollard diameter	115mm and 200mm
Drive motor	Electromechanical
Rising Time	7 seconds
Protection Class	IP67
Operating temperatures	-20c to +60c
Warranty	1 year



Environment

The STOPPY B provides the perfect solution for traffic management and security across a wide range of environments.



Options

Bollard types;

- 500mm and 700mm height
- Stainless steel finish
- Grey (RAL 7021) painted steel finish