



Bollards & Barriers
Direct

FAAC B680 BARRIER



B680 BARRIER




The FAAC B680 24v hydraulic barrier can operate beams from 2 to 8 meters. Built for continuous use the barrier comes complete with body and beam LED lights.

The B680H has an Hybrid heart which, together with its “everlasting” springs, allows it to exceed 2,000,000 cycles of continuous-use, raising 8 m beams in less than 6 seconds, in total safety, thanks to the reverse on contact feature.

FEATURES

- Manufactured by FAAC
- IP56 rated to withstand operating temperatures of -15°C to $+65^{\circ}\text{C}$
- Power Supply: 100-240v ~ 50/60 Hz
- Motor Supply: 240W 36v brushless
- Maximum beam length: 2-8 meters
- RED/Green traffic light crown
- Left or right handed

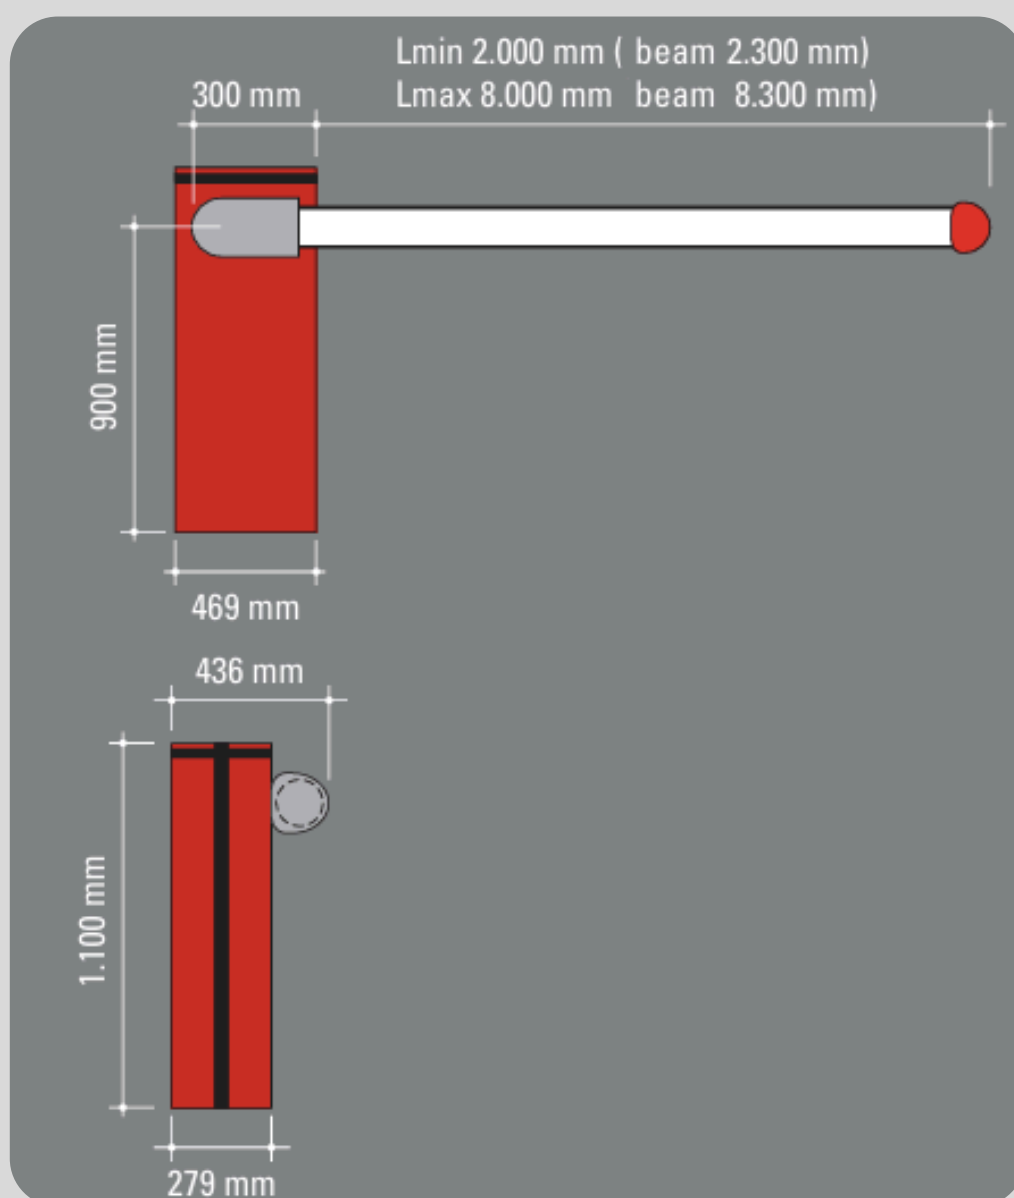

DATA

FAAC B680 Barrier	
Manufacturer	FAAC
Product	B680 barrier
Material (Barrier)	Steel and Aluminium
Barrier height	1100mm
Barrier width	469mm
Barrier depth	279mm
Beam length	2-8 meters (obtained by joining two modules)
Power supply	100-240v ~ 50/60 Hz
Power rated	240W
Drive motor	36v Brushless
Protection Class	IP56
Operation	Intensive
Opening time	6 seconds
Operating temperatures	-15c to +65c
Warranty	1 year



Environment

The B680H is a continual use barrier with a beam length from 2-8 meters. With its unique removable housing the barrier can be provided in four colours.



Options

Barrier cabinet;

- Pure White RAL 9010
- Flame Red RAL 3020
- Steel Blue RAL 5011
- Stainless steel

Barrier Beams;

- 2-8 meters