



Bollards & Barriers
Direct

SHIELD 600



BATTERY BOLLARD




The shield 600 is a battery operated automatic retractable bollard which provides an alternative solution where mains bollards are not an option.

With a rise and fall time of just 8 seconds, the 24v IP68 rated bollard has a charge cycle of 2-3 months based on rising and lowering 5 times per day making the bollard idea for low duty use commercially and for the residential market.

With the innovative battery design removing the need to power from mains, this battery bollard delivers a new solution in security.

FEATURES

- Power supply: 24v battery
- IP68 protection rating
- Available in 600mm and 900mm height
- 8 second rise and fall time
- 2x batteries supplied
- 1x charger supplied
- 2x transmitters supplied

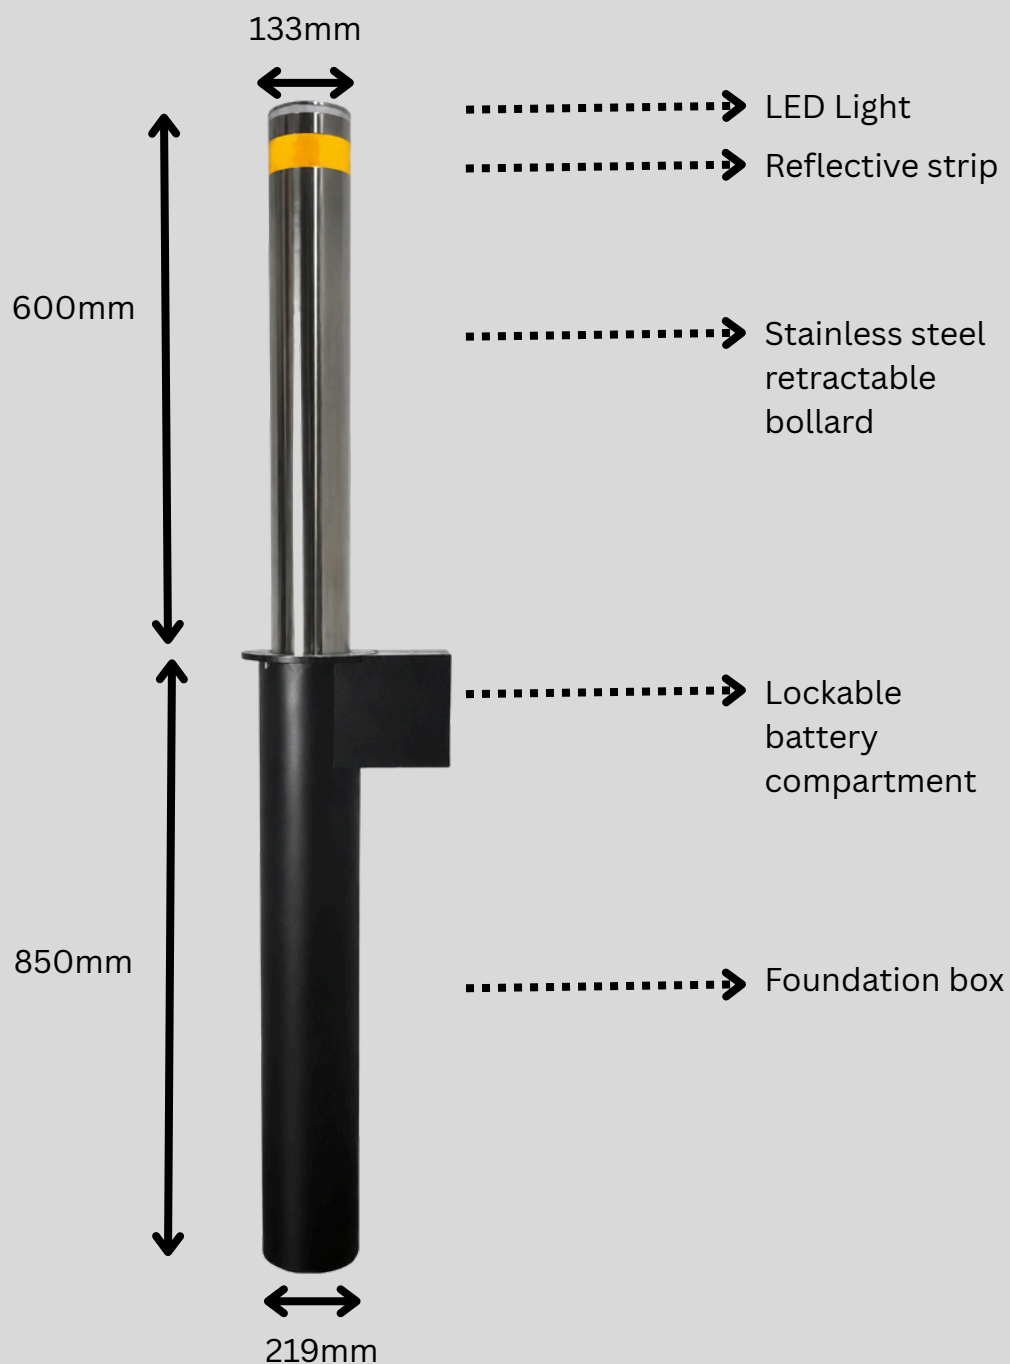

DATA

Shield 600 Battery Bollard	
Product	Shield 600 Battery Bollard
Material (Bollard)	304 grade stainless steel
Material (Foundation box)	Galvanised steel with RAL 9005 (black) powder coat
Bollard height	600mm and 900mm
Bollard diameter	133mm
Bollard wall thickness	6mm
Power supply	24v battery
Protection Class	IP68
Operation	Low use
Operating temperatures	-40c to +60c
Rising time	8 seconds
Lowering time	8 seconds
LED light	Red LED strip
Reflector	Yellow band
Remote control	20 meter operation (in direct line of sight)
App Based	No
Warranty	1 year
Types available	Automatic



Environment

Built from high grade 304 stainless steel the Shield 600 bollard delivers a state-of-the-art automatic bollard. The battery bollard eliminates the need for mains cable and ducting to your driveway.

Simply open the lockable battery compartment, swap the battery for the charged battery and begin using your bollard.



Options

Bollard types;

- 600mm height
- 900mm height (on special order)



Product add ons

Additional transmitters



Additional batteries



Additional charger



Battery compartment keys

